



# RL2-250(2V250Ah)

## Specification




Cells Per Unit	1
Voltage Per Unit	2
Nominal Capacity	250Ah@10hour-rate to 1.80V per cell @25°C
Weight	Approx. 15.1 Kg (Tolerance ±3%)
Internal Resistance	Approx. 0.76 mΩ
Terminal	F10(M8)
Max. Discharge Current	1250A (5 sec)
Short Circuit Current	2800A
Design Life	20 years (Float charging)
Recommended Maximum Charging Current	50 A
Reference Capacity	C1 154.4AH C3 193.8AH C5 218.5AH C10 250.0AH
Standby Use Voltage	2.27 V~2.30 V @ 25°C Temperature Compensation: -3mV/°C/Cell
Cycle Use Voltage	2.43 V~2.47 V @ 25°C Temperature Compensation: -4mV/°C/Cell
Operating Temperature Range	Discharge: -20°C~60°C Charge: 0°C~50°C Storage: -20°C~60°C
Normal Operating Temperature Range	25°C ±5°C
Self Discharge	RITAR Valve Regulated Lead Acid (VRLA) batteries can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly Self-discharge ratio is less than 3% at 25°C. Please charge batteries before using.
Container Material	A.B.S. UL94-HB, UL94-V0 Optional.



RL series is a general purpose battery with 20 years design life in float service. It meets with heavy duty grids, thicker plates, special additives and advanced AGM valve regulated technology, the RL series battery provides consistent performance and long service life. The new grid design effectively reduces the internal resistance, which provides higher specific energy density and excellent high rate discharge characteristics. It is suitable for communications back-up power and EPS/UPS applications.



## Dimensions

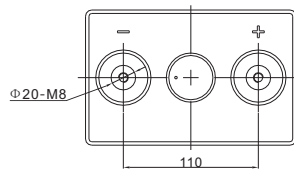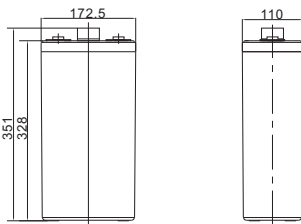

F10 TERMINAL

Length	172.5±2mm (6.79 inches)
Width	110±2mm (4.33 inches)
Height	328±2mm (12.9 inches)
Total Height	351±2mm (13.8 inches)
Terminal	Value
M5	6~7 N*m
M6	8~10 N*m
M8	10~12 N*m

Unit: mm

### Constant Current Discharge Characteristics : A (25°C)

F.V/Time	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR
1.60V	392.4	246.7	154.4	93.4	68.3	55.1	45.9	31.7	26.6
1.65V	382.1	241.3	151.6	92.0	67.4	54.4	45.4	31.4	26.4
1.70V	368.6	234.1	147.8	90.2	66.2	53.5	44.7	30.9	26.0
1.75V	351.0	224.8	142.8	87.8	64.6	52.3	43.7	30.4	25.6
1.80V	328.4	212.6	136.3	84.7	62.5	50.7	42.5	29.6	25.0
1.85V	299.8	197.1	127.9	80.5	59.7	48.6	40.9	28.6	24.2

### Constant Power Discharge Characteristics : WPC (25°C)


F.V/Time	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR
1.60V	712.7	461.3	292.7	178.4	131.2	106.1	89.7	62.3	52.4
1.65V	704.4	455.9	289.4	176.9	130.1	105.4	88.9	61.8	52.0
1.70V	683.3	443.9	283.0	173.8	128.1	103.8	87.7	61.0	51.4
1.75V	657.4	428.3	274.7	169.9	125.5	101.8	86.0	59.9	50.6
1.80V	621.2	407.1	263.5	164.4	121.8	99.1	83.7	58.5	49.5
1.85V	572.8	380.1	248.7	157.1	116.9	95.3	80.7	56.6	48.0

(Note) The above characteristics data are average values obtained within three charge/discharge cycle not the minimum values.


# RL2-250(2V250Ah)




## Discharge Characteristics Curve

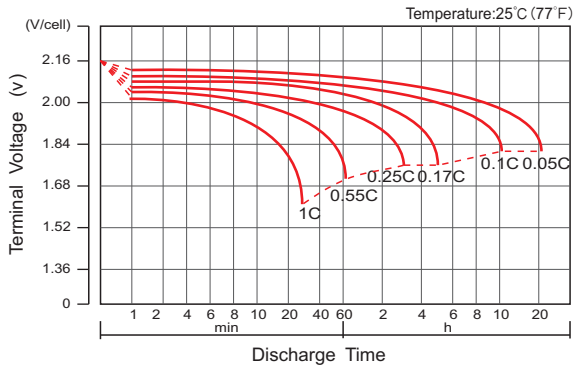


## Charge Characteristic Curve For Standby Use

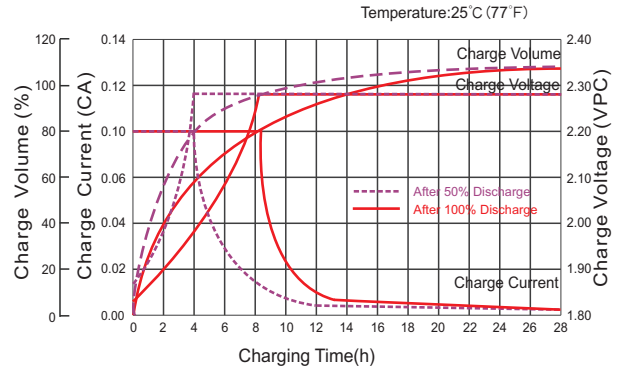


## Cycle Life In Relation To Depth Of Discharge

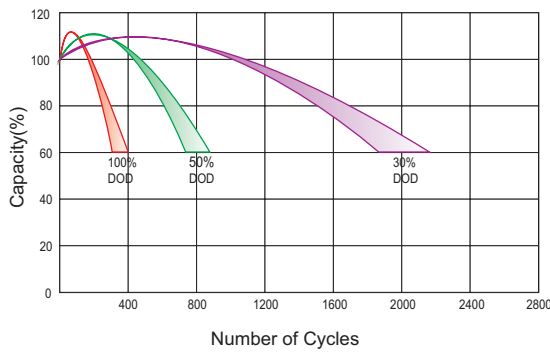


## Relationship Between Charging Voltage And Temperature

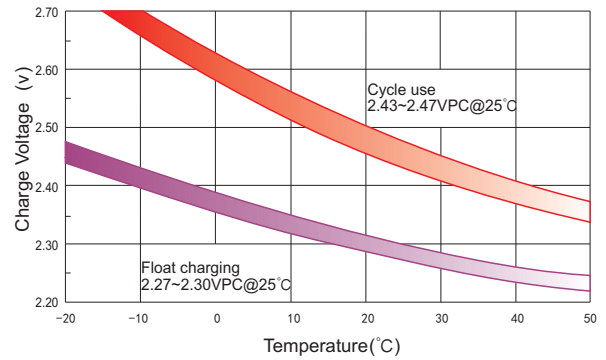


## Temperature Effects On Capacity

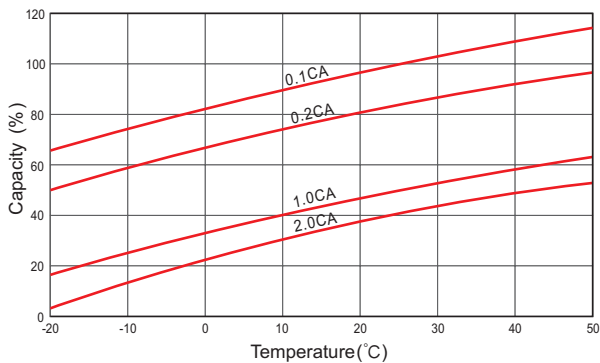


## Storage Characteristics

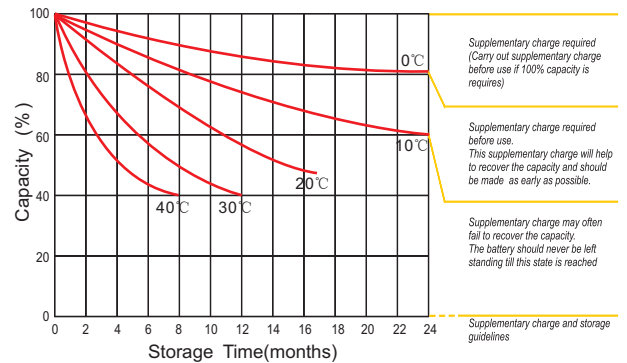

## Effect Of Temperature On Long Term Life

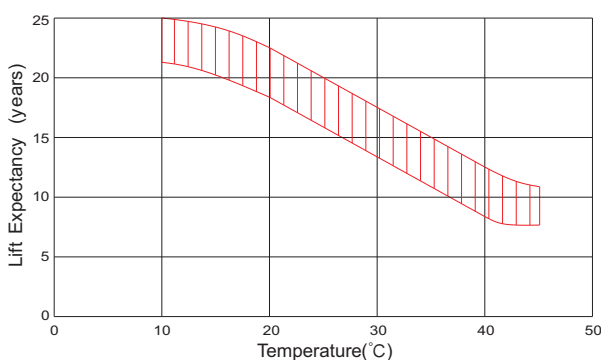

## Life Characteristics Of Standby Use

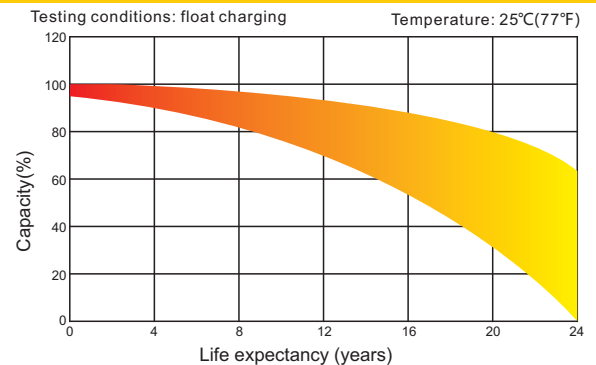

(Note) All above information shall be changed without prior notice, Ritar reserves the right to explain and update the latest information.