

DC12-160 (12V160Ah)



Specification

| | |
|------------------------------------|--|
| Cells Per Unit | 6 |
| Voltage Per Unit | 12 |
| Capacity | 160Ah@20hr-rate to 1.75V per cell @25°C |
| Weight | Approx. 50.0 Kg (Tolerance ± 1.5%) |
| Internal Resistance | Approx. 4 mΩ |
| Terminal | F12(M8)/F16(M8) |
| Max. Discharge Current | 1600A (5 sec) |
| Design Life | 12 years (floating charge) |
| Maximum Charging Current | 48.0 A |
| Reference Capacity | C3 118.8AH C5 134.0AH C10 152.0AH C20 160.0AH |
| Float Charging Voltage | 13.6 V~13.8 V @ 25°C Temperature Compensation: -3mV/°C/Cell |
| Cycle Use Voltage | 14.6 V~14.8 V @ 25°C Temperature Compensation: -4mV/°C/Cell |
| Operating Temperature Range | Discharge: -20°C~60°C Charge: 0°C~50°C Storage: -20°C~60°C |
| Normal Operating Temperature Range | 25°C ± 5°C |
| Self Discharge | RITAR Valve Regulated Lead Acid (VRLA) batteries can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly Self-discharge ratio is less than 3% at 25°C. Please charged batteries before using. |
| Container Material | A.B.S. UL94-HB, UL94-V0 Optional. |



DC (Deep Cycle) series batteries provide superior high integrity and reliability. It is specially designed for frequent cyclic charge and discharge. By using strong grids, thick plate and specially active material are designed for repeated deep-discharge applications. The DC series batteries offer 30% more cyclic life than the standby series. It is suitable for solar and wind renewable energy storage, mobility and medical equipment, V, telecom, broadband and cable TV, UPS systems etc.



ISO 9001



ISO 14001



OHSAS 18001




MH 28539



G4M20206-0910-E-16

Dimensions

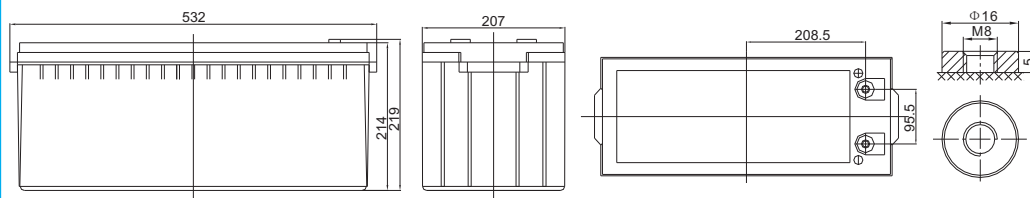

| | |
|--------------|-----------------------|
| Length | 532±2mm (20.9 inches) |
| Width | 207±2mm (8.15 inches) |
| Height | 214±2mm (8.43 inches) |
| Total Height | 219±2mm (8.62 inches) |
| Terminal | Value |
| M5 | 6~7 N*m |
| M6 | 8~10 N*m |
| M8 | 10~12 N*m |

F12 Terminal

Unit: mm

Constant Current Discharge Characteristics : A(25°C)

| F.V/Time | 10MIN | 15MIN | 30MIN | 1HR | 2HR | 3HR | 4HR | 5HR | 8HR | 10HR | 20HR |
|----------|-------|-------|-------|------|------|------|------|------|------|------|------|
| 1.60V | 328.2 | 261.2 | 153.1 | 92.0 | 56.2 | 42.3 | 33.5 | 28.2 | 19.3 | 16.3 | 8.31 |
| 1.65V | 317.2 | 253.4 | 149.9 | 90.3 | 55.3 | 41.7 | 33.0 | 27.9 | 19.0 | 16.2 | 8.24 |
| 1.70V | 303.0 | 243.2 | 145.6 | 88.0 | 54.0 | 40.8 | 32.4 | 27.4 | 18.8 | 15.9 | 8.14 |
| 1.75V | 283.9 | 229.4 | 139.8 | 84.8 | 52.3 | 39.6 | 31.6 | 26.8 | 18.4 | 15.6 | 8.00 |
| 1.80V | 258.3 | 210.8 | 131.9 | 80.5 | 49.9 | 38.0 | 30.4 | 25.9 | 17.8 | 15.2 | 7.80 |
| 1.85V | 223.5 | 185.2 | 120.7 | 74.3 | 46.4 | 35.6 | 28.7 | 24.6 | 17.0 | 14.6 | 7.52 |

Constant Power Discharge Characteristics : WPC(25°C)


| F.V/Time | 10MIN | 15MIN | 30MIN | 1HR | 2HR | 3HR | 4HR | 5HR | 8HR | 10HR | 20HR |
|----------|-------|-------|-------|-----|------|------|------|------|------|------|------|
| 1.60V | 587 | 481 | 293 | 181 | 112 | 85.1 | 67.7 | 57.3 | 39.6 | 33.8 | 17.2 |
| 1.65V | 583 | 476 | 291 | 180 | 111 | 84.3 | 67.1 | 56.8 | 39.3 | 33.5 | 17.1 |
| 1.70V | 563 | 461 | 284 | 176 | 109 | 82.8 | 66.0 | 56.0 | 38.7 | 33.1 | 16.9 |
| 1.75V | 537 | 441 | 276 | 170 | 106 | 80.7 | 64.5 | 54.9 | 38.0 | 32.5 | 16.6 |
| 1.80V | 497 | 411 | 263 | 162 | 101 | 77.7 | 62.3 | 53.2 | 36.9 | 31.6 | 16.3 |
| 1.85V | 437 | 366 | 243 | 151 | 95.0 | 73.2 | 59.1 | 50.7 | 35.3 | 30.4 | 15.7 |

(Note) The above characteristics data are average values obtained within three charge/discharge cycle not the minimum values.

DC12-160(12V160Ah)



Discharge Characteristics Curve

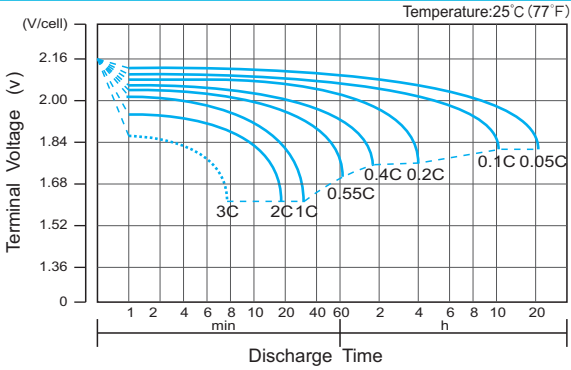

Charge Characteristic Curve for Cycle Use(IU)




Cycle Life in Relation to Depth of Discharge




Relationship Between Charging Voltage and Temperature




Temperature Effects on Capacity

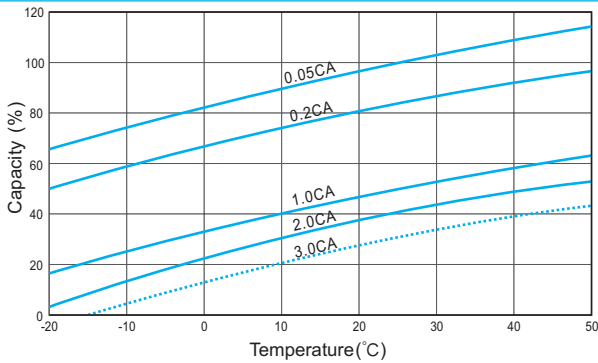


Storage Characteristics

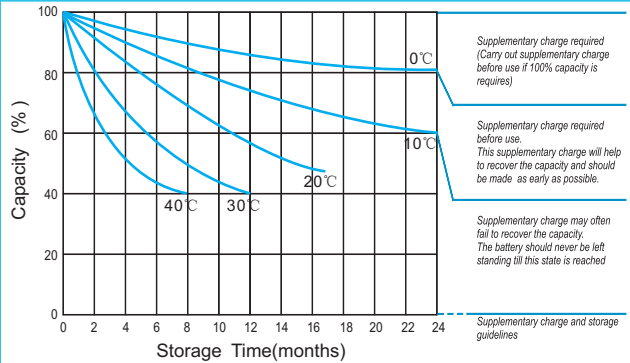

Effect of Temperature on Long Term Life

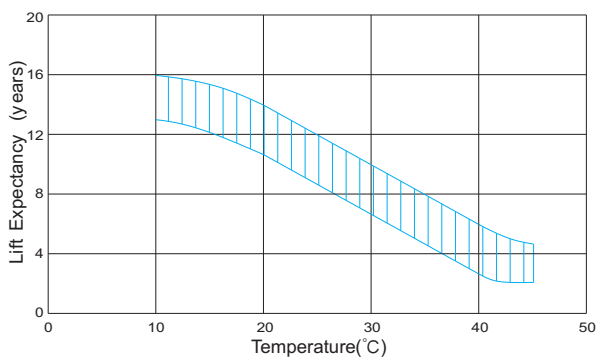

Relationship of OCV And State of Charge(20°C)

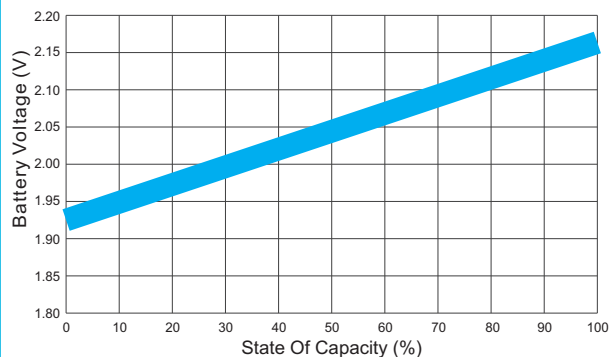

(Note) All above information shall be changed without prior notice, Ritar reserves the right to explain and update the latest information.