



# RA12-240B(12V240Ah)

## Specification

Cells Per Unit	6
Voltage Per Unit	12
Nominal Capacity	240Ah@10hour-rate to 1.80V per cell @25°C
Weight	Approx. 66.5 Kg (Tolerance ± 1.5%)
Internal Resistance	Approx. 3.6 mΩ
Terminal	F16(M8)/F10(M8)
Max. Discharge Current	2400A (5 sec)
Short Circuit Current	4300A
Design Life	12 years (Float charging)
Recommended Maximum Charging Current	72 A
Reference Capacity	C3 186.3AH C5 214.5AH C10 240.0AH C20 254.0AH
Standby Use Voltage	13.6 V~13.8 V @ 25°C Temperature Compensation: -3mV/°C/Cell
Cycle Use Voltage	14.6 V~14.8 V @ 25°C Temperature Compensation: -4mV/°C/Cell
Operating Temperature Range	Discharge: -20°C~60°C Charge: 0°C~50°C Storage: -20°C~60°C
Normal Operating Temperature Range	25°C±5°C
Self Discharge	RITAR Valve Regulated Lead Acid (VRLA) batteries can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly Self-discharge ratio is less than 3% at 25°C. Please charge batteries before using.
Container Material	A.B.S. UL94-HB, UL94-V0 Optional.



RA series is a general purpose battery with 12 years design life in float service. It meets with IEC, JIS, BS and YDT standards. With advanced AGM valve regulated technology and high purity raw material, the RA series battery maintains high consistency for better performance and reliable standby service life. It is suitable for UPS/EPS, Telecom, power grid, medical equipment, emergency light and security system applications.



## Dimensions

Length	522±2mm (20.6 inches)
Width	240±2mm (9.45 inches)
Height	219±2mm (8.62 inches)
Total Height	224±2mm (8.82 inches)
Terminal	Value
M5	6~7 N*m
M6	8~10 N*m
M8	10~12 N*m

Unit: mm

### Constant Current Discharge Characteristics : A (25°C)

F.V/Time	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	398.5	246.8	147.8	88.5	65.7	53.3	45.0	30.1	25.6	13.1
1.65V	388.0	241.4	145.0	87.2	64.8	52.7	44.5	29.8	25.3	13.0
1.70V	374.3	234.2	141.4	85.5	63.6	51.8	43.8	29.4	25.0	12.9
1.75V	356.4	224.8	136.6	83.2	62.1	50.6	42.9	28.8	24.6	12.7
1.80V	333.4	212.7	130.4	80.2	60.1	49.1	41.7	28.1	24.0	12.4
1.85V	304.4	197.2	122.4	76.3	57.4	47.0	40.1	27.2	23.3	12.1

### Constant Power Discharge Characteristics : WPC (25°C)


F.V/Time	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	707.0	455.0	280.4	170.3	127.3	103.9	88.1	59.6	51.0	26.2
1.65V	703.0	451.6	278.2	169.0	126.4	103.2	87.5	59.2	50.7	26.1
1.70V	684.0	440.7	272.1	166.2	124.4	101.7	86.3	58.5	50.0	25.8
1.75V	660.9	427.4	264.3	162.5	121.9	99.8	84.8	57.5	49.2	25.5
1.80V	627.0	408.4	253.5	157.5	118.4	97.1	82.7	56.2	48.2	25.0
1.85V	580.5	382.3	239.6	150.6	113.7	93.4	79.8	54.5	46.7	24.4

(Note) The above characteristics data are average values obtained within three charge/discharge cycle not the minimum values.


# RA12-240B(12V240Ah)




## Discharge Characteristics Curve

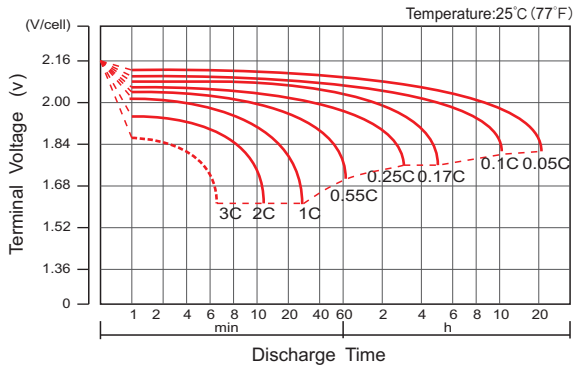


## Charge Characteristic Curve For Standby Use

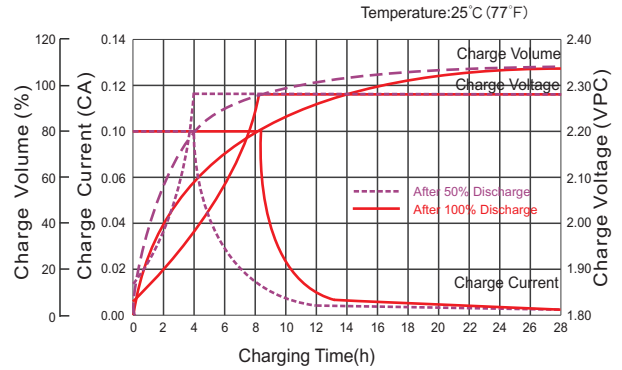


## Cycle Life In Relation To Depth Of Discharge

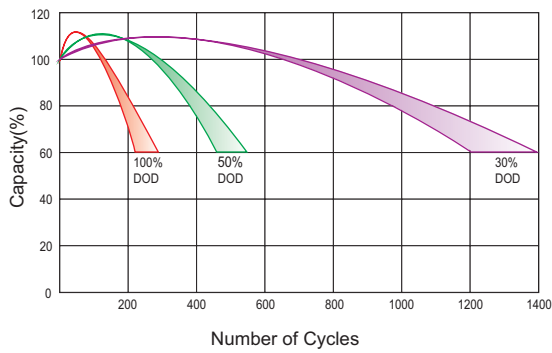


## Relationship Between Charging Voltage And Temperature

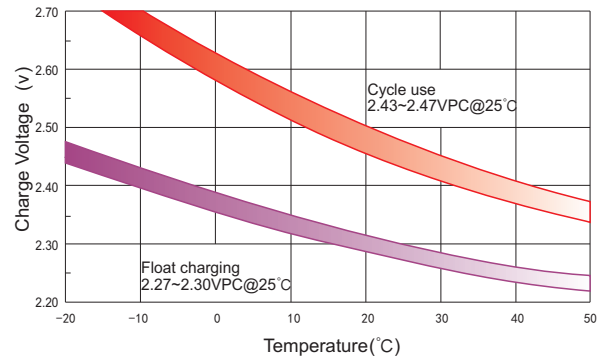


## Temperature Effects On Capacity

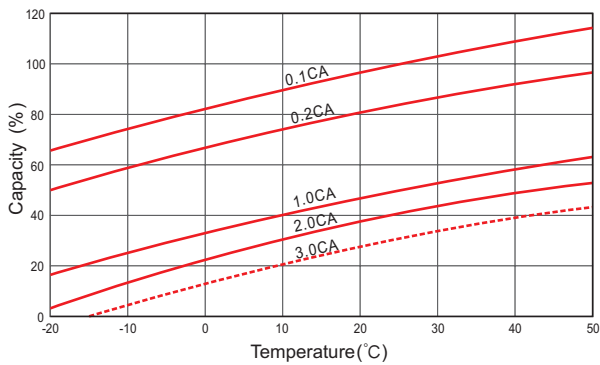


## Storage Characteristics

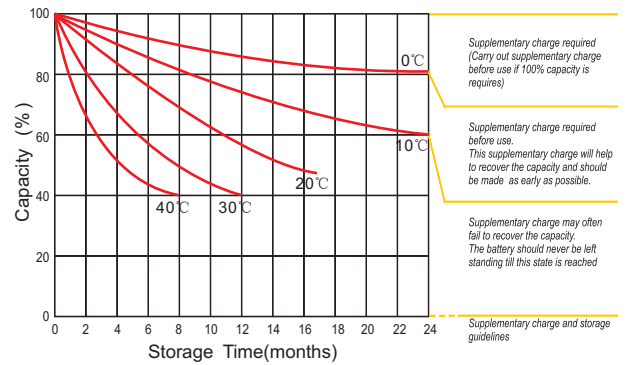

## Effect Of Temperature On Long Term Life

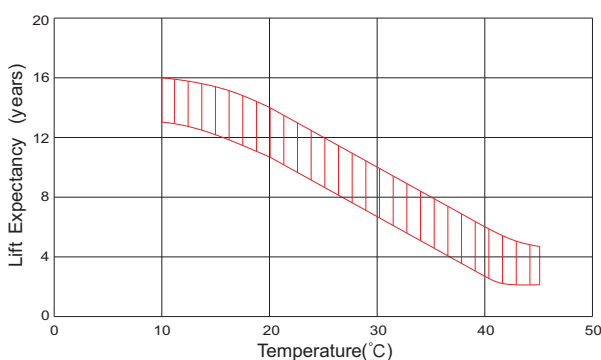

## Life Characteristics Of Standby Use

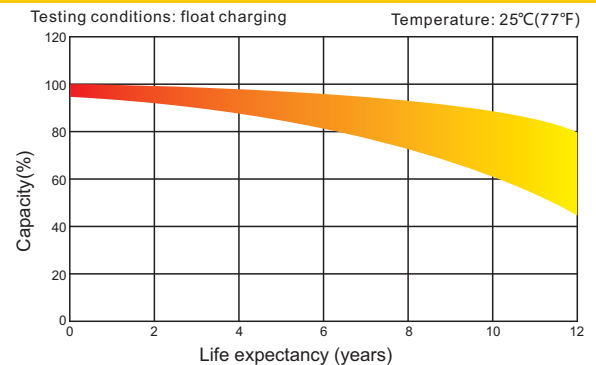

(Note) All above information shall be changed without prior notice, Ritar reserves the right to explain and update the latest information.