



RT12260S(12V26Ah)

Specification

Cells Per Unit	6
Voltage Per Unit	12
Nominal Capacity	26Ah@20hour-rate to 1.75V per cell @25°C
Weight	Approx. 8.3 Kg (Tolerance ±3.0%)
Internal Resistance	Approx. 11.5 mΩ
Terminal	F7(M8)/F11(M6)
Max. Discharge Current	260A (5 sec)
Short Circuit Current	850A
Design Life	6~8 years (Float charging)
Recommended Maximum Charging Current	7.8 A
Reference Capacity	C3 20.0AH C5 22.6AH C10 24.2AH C20 26.0AH
Standby Use Voltage	13.7 V~13.9 V @ 25°C Temperature Compensation: -3mV/°C/Cell
Cycle Use Voltage	14.6 V~14.8 V @ 25°C Temperature Compensation: -4mV/°C/Cell
Operating Temperature Range	Discharge: -20°C~60°C Charge: 0°C~50°C Storage: -20°C~60°C
Normal Operating Temperature Range	25°C ±5°C
Self Discharge	RITAR Valve Regulated Lead Acid (VRLA) batteries can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly Self-discharge ratio is less than 3% at 25°C. Please charge batteries before using.
Container Material	A.B.S. UL94-HB, UL94-V0 Optional.



RT series is a general purpose battery with 6~8 years design life in float service. It meets with IEC, JIS, BS and YDT standards. With advanced AGM valve regulated technology and high purity raw material, the RT series battery maintains high consistency for better performance and reliable standby service life. It is suitable for UPS/EPS, Telecom, power grid, medical equipment, emergency light and security system applications.



Dimensions

Length	165±1.5mm (6.50 inches)
Width	125±1.5mm (4.92 inches)
Height	174±1.5mm (6.85 inches)
Total Height	174±1.5mm (6.85 inches)
Terminal	Value
M5	6~7 N*m
M6	8~10 N*m
M8	10~12 N*m

Unit: mm

Constant Current Discharge Characteristics : A (25°C)

F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	93.03	61.95	46.17	26.99	15.60	9.687	7.042	5.608	4.734	3.163	2.576	1.344
1.65V	89.67	60.10	44.96	26.40	15.31	9.545	6.948	5.538	4.679	3.131	2.552	1.334
1.70V	85.30	57.68	43.37	25.62	14.93	9.357	6.824	5.445	4.606	3.089	2.519	1.319
1.75V	79.68	54.55	41.30	24.59	14.42	9.107	6.658	5.322	4.510	3.032	2.476	1.300
1.80V	72.60	50.55	38.64	23.26	13.77	8.779	6.441	5.160	4.382	2.957	2.418	1.275
1.85V	63.89	45.54	35.28	21.56	12.92	8.353	6.156	4.947	4.214	2.858	2.342	1.241

Constant Power Discharge Characteristics : WPC (25°C)


F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	160.1	106.9	81.93	49.77	29.60	18.64	13.79	11.04	9.36	6.33	5.19	2.69
1.65V	158.4	106.4	81.47	49.40	29.36	18.50	13.69	10.96	9.29	6.29	5.15	2.67
1.70V	152.4	103.3	79.27	48.20	28.73	18.19	13.48	10.80	9.17	6.21	5.09	2.64
1.75V	144.9	99.45	76.58	46.75	27.90	17.78	13.21	10.60	9.01	6.11	5.01	2.61
1.80V	134.3	93.76	72.66	44.67	26.75	17.23	12.83	10.31	8.78	5.97	4.90	2.56
1.85V	120.3	85.97	67.28	41.82	25.29	16.48	12.31	9.92	8.47	5.79	4.75	2.50

(Note) The above characteristics data are average values obtained within three charge/discharge cycle not the minimum values.

RT12260S(12V26Ah)



Discharge Characteristics Curve

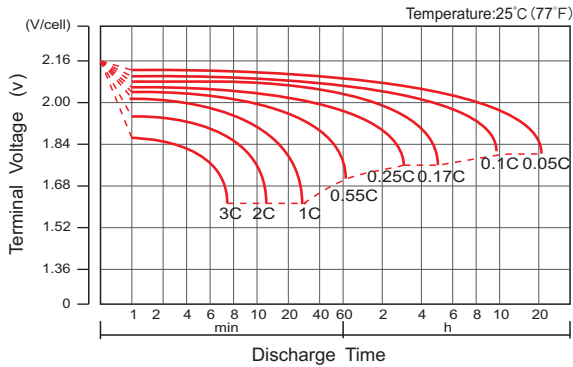

Charge Characteristic Curve For Standby Use



Cycle Life In Relation To Depth Of Discharge



Relationship Between Charging Voltage And Temperature




Temperature Effects On Capacity



Storage Characteristics



Effect Of Temperature On Long Term Life

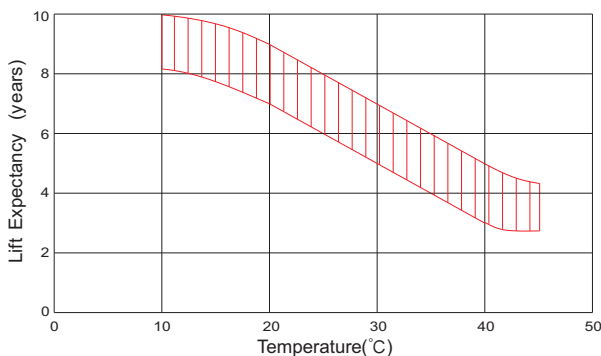

Life Characteristics Of Standby Use



(Note) All above information shall be changed without prior notice, Ritar reserves the right to explain and update the latest information.